

**RICOH**  
imagine. change.



***ScanSnap***  
***iX1300***




Connect your worlds  
with one touch.

# Balance size and performance

## “Just the right fit” to keep life organized

ScanSnap iX1300 is the compact, yet powerful solution to all your daily and ad-hoc scanning needs. At home, in the office, or even within your remote workspace, the device takes the pain out of scanning so that you are well on your way to quick and easy digitization, the moment you need it.

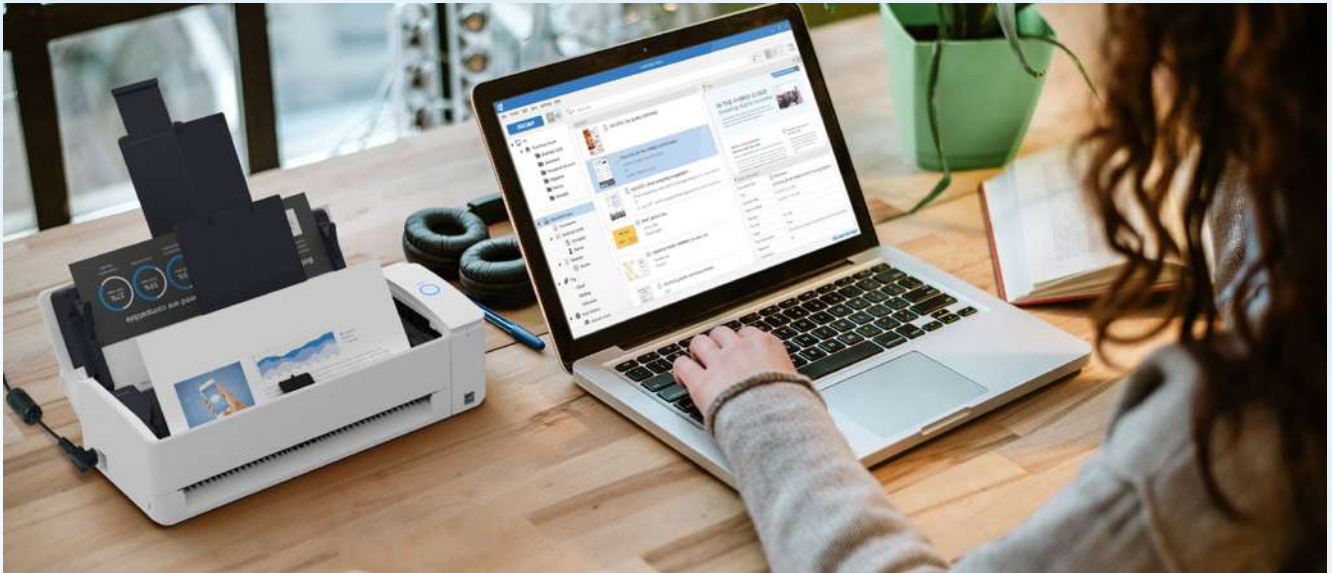

## Get right into new ways of working and scanning

### Two ways to scan to match your documents and environment

No need to worry about saving space for documents using U-turn Scan. Equipped with a new ADF (Automatic Document Feeder) for ejecting scanned paper to the top of the scanner, sit back and relax as scanning proceeds with just a practical space of A4 size or smaller required.



Use Return Scan, to read a wide variety of documents, even feeding manually one by one while multi-tasking at work. The iX1300 feeds and ejects documents from the front, making it a breeze to scan documents like folded paper, business cards, receipts, photographs, and postcards, without having to make any adjustments.

### Scan almost anywhere

Use the iX1300 to scan in any location with Wi-Fi. 2.4/5 GHz<sup>1</sup> support allows stable wireless scanning as an added plus to USB. In environments where Wi-Fi is available, ScanSnap Cloud<sup>1</sup> works with a variety of cloud services to save documents to all your favorite cloud services on a simple touch of the button. Images are optimized and sorting absolutely, fuss-free with a host of automated functions. Bring along your AC cable, and the iX1300 is sure to be the right fit with superb performance.

<sup>1</sup> Availability of 5 GHz Wi-Fi and ScanSnap Cloud may vary depending on region.

## Handy, convenient, but powerful

### Simplicity makes the experience beautiful

The iX1300 comes with just one button, so that you can perform all your scanning tasks with the ScanSnap-favorite “one touch”. Keep digitization processes simple, while boosting efficiency.

### Ready to scan right away

Get ready for revolutionary scanning with a single action. One single action to open the cover and bring the iX1300 to life. The extension slides out on opening of the cover, so that all you need to do, is place your documents and press the Scan button for clean and optimized images.

Daily ad-hoc scanning can be carried out with the cover closed as well. No need to power the scanner on yourself, as it awakens on feeding documents from the front.

### Faster scanning for bigger batches

Productivity is never placed second in priority with ScanSnap. The iX1300 thrives at 30 ppm and holds up to 20 sheets, doubling the capacity of its predecessor. Scan both sides of batches up to 20 documents in less than 40 seconds for speedy and hassle-free digitization.



## The all-in-one solution for document management

ScanSnap Home<sup>2</sup> is a comprehensive document management software specially designed for ScanSnap scanners. Easily manage, edit, and utilize scans with just one application. Both a PC version and mobile version are available.

### Accommodates any scanning environment

- Create profile icons to preset save-to destinations, cloud services, color settings and much more.
- Save as PDF, searchable PDF, and JPEG for versatile utilization of scanned data.
- For users of ScanSnap Home (for PC), the Quick Menu enables you to select saving and integration destinations after scanning, which raises productivity.

### Accesses to the same data regardless of device and time with Data Sync<sup>3</sup>

The Data Sync feature allows you to synchronize scanned data between the PC and mobile versions of ScanSnap Home. This enables access to the same data whether you scan using a PC or a smartphone. You can utilize scanned data across various locations and devices. For example, check scans done at the office or at home while on the go via your smartphone, or manage the same data on both office and home PCs.<sup>4</sup>

## General Specifications

Product name	<b>ScanSnap iX1300 (White/Black)</b>		
Scanner type	ADF (Automatic Document Feeder)/Manual Feeder, Duplex		
Scanning color mode	Color, Grayscale, Monochrome, Automatic (Color/Grayscale/Monochrome <sup>*1</sup> detection)		
Image sensor	CIS x 2 (Front x 1, Back x 1)		
Light source	3 Color LED (Red/Green/Blue)		
Optical resolution	600 dpi for Color or Grayscale, 1200 dpi for Monochrome		
Scanning speed <sup>*2</sup> (A4 portrait)	U-turn scan (ADF)	Auto mode (Default) <sup>*3</sup>	Simplex/Duplex: 30 ppm
		Normal mode	Simplex/Duplex: 30 ppm (Color/Grayscale: 150 dpi, Monochrome: 300 dpi)
		Better mode	Simplex/Duplex: 30 ppm (Color/Grayscale: 200 dpi, Monochrome: 400 dpi)
		Best mode	Simplex/Duplex: 30 ppm (Color/Grayscale: 300 dpi, Monochrome: 600 dpi)
	Return scan (Manual Feeder)	Excellent mode <sup>*4</sup>	Simplex/Duplex: 9 ppm (Color/Grayscale: 600 dpi, Monochrome: 1,200 dpi)
		Auto mode (Default) <sup>*3</sup>	5 seconds (Color/Grayscale: 150 dpi, Monochrome: 300 dpi)
		Normal mode	5 seconds (Color/Grayscale: 150 dpi, Monochrome: 300 dpi)
		Better mode	5 seconds (Color/Grayscale: 200 dpi, Monochrome: 400 dpi)
		Best mode	5 seconds (Color/Grayscale: 300 dpi, Monochrome: 600 dpi)
		Excellent mode <sup>*4</sup>	14 seconds (Color/Grayscale: 600 dpi, Monochrome: 1,200 dpi)
Document size	U-turn scan (ADF)	Minimum: 50.8 x 50.8 mm (2 x 2 in.) Maximum: 216 x 355.6 mm (8.5 x 14 in.)	
	Return scan (Manual Feeder)	Minimum: 50.8 x 50.8 mm (2 x 2 in.) <sup>*7</sup> Maximum: 216 x 355.6 mm (8.5 x 14 in.)	
	With Photo Carrier Sheet (Option) <sup>*5</sup>	Minimum: 25.4 x 25.4 mm (1 x 1 in.) Maximum: 127 x 178 mm (5.0 x 7.0 in.)	
	With Carrier Sheet (Option) <sup>*5</sup>	Minimum: 25.4 x 25.4 mm (1 x 1 in.) Maximum: 297 x 431.8 mm (11.69 x 17 in.)	
	With Booklet Carrier Sheet (Option) <sup>*5</sup>	Minimum: 25.4 x 25.4 mm (1 x 1 in.) Maximum: 150 x 195 mm (5.9 x 7.67 in.)	
	Long paper scanning <sup>*6</sup>	PC	3,000 mm (863 mm in 32-bit) <sup>*8</sup>
Paper weight (Thickness)	U-turn scan (ADF)	40 to 128 g/m <sup>2</sup> (11 to 34 lb) A8 size or less: 128 to 209 g/m <sup>2</sup> (34 to 56 lb) A6 size or less: 40 to 209 g/m <sup>2</sup> (11 to 56 lb)	
	Return scan (Manual Feeder)	Paper: 20 to 413 g/m <sup>2</sup> (5.4 to 110 lb) Booklets: 2 mm (0.08 in.) or less <sup>*1</sup> Cards: 1.4 mm (0.06 in.) or less <sup>*9</sup> (Includes embossed cards)	
ADF capacity <sup>*10</sup>	20 sheets (A4, 80 g/m <sup>2</sup> or 20 lb)		
Interface	USB	USB 3.2 Gen 1x1 / USB 3.0 / USB 2.0 / USB 1.1 (Connector Type: Type-B) <sup>*11</sup>	
	Wi-Fi	IEEE802.11a/b/g/n/ac Frequency band: 2.4 GHz / 5 GHz <sup>*12</sup>	
Wi-Fi Interface	Access Point Connect Mode (Infrastructure mode) <sup>*13</sup> Direct Connect Mode (Ad-hoc mode) <sup>*14</sup>		
Power requirement	AC 100 to 240 V, 50/60 Hz		
Power consumption	Operating	17 W or less	
	Sleep mode (USB connection)	1.7 W or less	
	Sleep mode (Wi-Fi connection)	2.0 W or less	
Standby mode	0.3 W or less		
Operation environment	Temperature: 5 to 35 °C (41 to 95 °F) Relative humidity: 20 to 80% (Non-condensing)		
Dimensions (W x D x H) <sup>*15</sup>	296 x 114 x 87 mm (11.7 x 4.5 x 3.4 in.)		
Device weight	2.0 kg (4.4 lb)		
Environmental compliance	ENERGY STAR/RoHS		
Multifeed detection	Length detection		
Driver	ScanSnap Home (ScanSnap specific driver) • Windows: Does not support TWAIN/ISIS™ • macOS: Does not support TWAIN		

<sup>\*1</sup> Feature is unavailable when using ScanSnap Connect Application. <sup>\*2</sup> Scanning speeds may vary due to the system environment. For details, please visit our website at: <https://www.pfu.ricoh.com/global/scanners/scansnap/>. <sup>\*3</sup> Scans will be performed in 300 dpi (Color/Grayscale) or 600 dpi (Monochrome) if shorter sides are less than 105 mm, and in 200 dpi (Color/Grayscale) or 400 dpi (Monochrome) if shorter sides exceed 105 mm. <sup>\*4</sup> Feature is unavailable when using ScanSnap Cloud. <sup>\*5</sup> Carrier sheet scanning is only supported when scanning documents in Return scan (Manual Feeder). <sup>\*6</sup> Long page scanning (Color/Grayscale: 200 dpi, Monochrome: 400 dpi) is only supported when scanning documents in U-turn scan (ADF). When using ScanSnap Connect Application and ScanSnap Cloud, scans are performed in Color/Grayscale: 200 dpi, Monochrome: 400 dpi. <sup>\*7</sup> A5, B4, 11 x 17 in. document sizes are required to be folded in half. <sup>\*8</sup> Scanning in "Excellent mode" is supported with documents of up to 360 mm. <sup>\*9</sup> Compliant with Type ISO/IEC ID-1. <sup>\*10</sup> Maximum capacity varies, depending upon paper weight. <sup>\*11</sup> Some computers do not recognize the ScanSnap when it is connected to a USB 3.2 Gen1/3.0 port. In this case, please use a USB 2.0 cable. <sup>\*12</sup> Availability of 5 GHz Wi-Fi may vary depending on region. <sup>\*13</sup> Access Point Connect Mode requires a Wi-Fi access point or router. <sup>\*14</sup> 5 GHz Wi-Fi is not available with Direct Connect Mode. <sup>\*15</sup> Excluding the stacker and other external attachments.

## Consumables

Description	Part number	Remarks
Pick Roller <sup>*1</sup>	PA03805-0021	Lifetime: Every 100,000 sheets
Pad Unit <sup>*1</sup>	PA03805-0022	Lifetime: Every 30,000 sheets
Cleaner F1	PA03950-0352	100 ml bottle For use on the Pad unit and Pick roller
Cleaning Wipe	PA03950-0419	24 packets For use on the Pad unit and Pick roller
Cleaning Paper	CA99501-0012	10 sheets Use this non-woven sheet with Cleaner F1

<sup>\*1</sup> Replacement cycles are guidelines for using A4 documents (80 g/m<sup>2</sup> [20 lb]). These cycles vary depending on the type of documents scanned, how often the scanner is used and cleaned, and your operating environment. <sup>\*2</sup> It is recommended to use original or approved accessories for consumables, options and cleaning kits, specially designed for your device. Device failures, troubles and damages arising from use of OEM or 3rd Party accessories may render your warranty invalid and incur charges for repair even during the warranty period.

## Options

Description	Part number	Remarks
Carrier Sheets <sup>*1</sup>	PA03360-0013	Contains 5 sheets supporting photographs and various document sizes
Photo Carrier Sheets	PA03370-0015	Contains 3 sheets supporting photographs (E-size, L-size, King-size), postcards, and business cards
Booklet Carrier Sheet	PA03810-0020	Contains 1 sheet supporting booklets
ScanSnap Soft Case M	PA03805-0002	Stores the ScanSnap iX1300 and accessories

<sup>\*1</sup> Although ScanSnap Carrier Sheets have a listed lifespan of 500 scans, the lifespan may vary with usage. ScanSnap Carrier sheets are intended to scan paper documents with weights of 209 g/m<sup>2</sup> or less. They also support the scanning of folded documents that are as large as 216 x 297 mm.

## ScanSnap iX1300 System Requirements

### • Windows

Operating systems	Windows 11 (64-bit) Windows 10 (32-bit / 64-bit) <sup>*1*</sup>	
Hardware requirements <sup>*3</sup>	CPU <sup>*4</sup>	Intel or Intel-compatible processors
	Display resolution	1,024 x 768 pixels or more
	Disk capacity <sup>*5*</sup>	3.8 GB or more of free disk space

<sup>\*1</sup> ScanSnap scanners do not run with Windows 10 Enterprise 2015 LTSB and Windows 11 and 10 ARM-based PCs such as Surface Pro X (Microsoft). <sup>\*2</sup> Operate Windows in desktop mode. <sup>\*3</sup> The ScanSnap device may not work if the connected computer does not meet these requirements. <sup>\*4</sup> Scanning speeds may vary due to the system environment. <sup>\*5</sup> Indicated disk capacity requirements apply when downloading ScanSnap Home (for PC). <sup>\*6</sup> .NET Framework 4.8 or later must be installed. If it is not installed, it is installed with ScanSnap Home (for PC). Up to 4.5 GB of disk space is required for the installation.

<sup>\*</sup> Please refer to the ScanSnap website for the latest support information of the driver and applications. Compatibility may differ depending on the software's version. <sup>\*</sup> The system requirements may change depending on the support policies of the above system and third-party software.

### • Mac

Operating systems	macOS Monterey 12 or later	
Hardware requirements <sup>*1</sup>	CPU <sup>*2</sup>	Intel processor or Apple silicon
	Display resolution	1,024 x 768 pixels or more
	Disk capacity	2.5 GB or more of free disk space

<sup>\*1</sup> The ScanSnap device may not work if the connected computer does not meet these requirements. <sup>\*2</sup> Scanning speeds may vary due to the system environment. <sup>\*</sup> Compatibility may differ depending on software versions. Please visit the ScanSnap website for latest information on driver and application support. <sup>\*</sup> The system requirements may change depending on the support policies of the above system and third-party software.

### • Other Devices

iOS/iPadOS	iOS 16 or later/iPadOS 16 or later
Android™/ChromeOS	Android 10 or later/ChromeOS 138.0.7204.178 or later

<sup>\*</sup> Wi-Fi environment is required.

### • Software

Windows	Mac	iOS/iPadOS	Android™/ChromeOS
ScanSnap Home (for PC) <sup>*1</sup>		ScanSnap Home (for mobile)	

<sup>\*1</sup> ScanSnap Home (for PC) installation requires a computer and Internet. Please visit the company website for download information. <https://www.pfu.ricoh.com/global/scanners/scansnap/g-support/en/>

### Accessories

• Safety Precautions • AC Cable • AC Adapter • USB Cable

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

<sup>\*</sup> Product names and company names are the registered trademarks or trademarks of the respective companies.



PFU Limited has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are trademarks or registered trademarks of the U.S. Environmental Protection Agency.

Safety Precautions	Be sure to carefully read all safety precautions prior to using this product and use this device as instructed.	Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to this product.
--------------------	---	---

# PFU Limited

<https://www.pfu.ricoh.com/global/>

RICOH and RICOH logo are registered trademarks of Ricoh Co., Ltd. Other product names are the trademarks or registered trademarks of the respective companies.

Specifications are subject to change without notice. Visit the ScanSnap website for more information. <https://www.pfu.ricoh.com/global/scanners/scansnap/>